



Products that carry this brand are adjusted to the restriction of dangerous substances



All our products are recyclable and do not contaminate the environment



The Certificate of Conformity of Europe (Mark CE) is a mark to indicate that the product to which it is fixed is in conformity with Managing European norms of the Products safety union. These instructions of the UR apply to all the products used inside the European Economic Zone.

The lights have spare life of 50 000h

Advantages of the LED Intelligent Lights

Less energy consumption: In general, a LED lamp consumes 65% less than the fluorescent, 80% less than the incandescent and halogen and 50% of the low-consumption.

Cleaner: do not contain mercury or other heavy metals and emit less CO₂ to achieve the same lighting as a result of their low power consumption. In addition do not radiate ultraviolet or infrared.

Durability and good maintenance of the luminous flux:

The durability of a LED lamp is 50,000 hours.

Quick Start: great advantage over compact fluorescent lamps.

Generate little heat: Do not burn when you touch them although they carry hours lit and save energy in air conditioning in summer to not emit heat.

Great variety of color: They are available in several colors with a price similar to white light standard.

Ease of maintenance: the refitting of the LED lights is very simple and does not require skilled labor.

Great possibilities of design: The variety of sizes, colors, and the total regulation of intensity allows possibilities decorative and functional endless.

FLOOD LIGHT LED




MT-FL-50W-A



产品规格 (Product Spec) :

电气特性 (Electrical Characteristics)		光学特性(Optical Properties)		
电源 Power Supply	Normal / MEAN WELL	光源 LED Type	晶元 (Epistar) 普瑞 (Bridgelux)	
输入电压 Input Voltage	AC85-265V /50-60Hz	光源数量 LED Q'ty	1 pcs	
额定功率 Rated Power	50W	流明值 Lumen	4250-4750 lm	
功率因素 Power Factor	0.95	显色指数 CRI	≥ 75 Ra	
防护等级 Waterproof	IP65	发光角度 Beam Angle	120°	
使用寿命 Life Time	≥ 50000H	色温 CCT	warm white	2800-3000K
				3000-3200K
			Natural white	4000-4500K
			Pure white	5000-5500K 6000-6500K
产品材质 (Product Material)				
电源线 Power Wire	外壳材质 Body material	电气安全等级 Electronic safety grade		
3*0.75mm² 0.5M 橡胶线 (Rubber cable L=0.5M)	铝 + 钢化玻璃 Aluminum + Toughened glass	I 类 (class)		
工作温度 Working Temperature		-30~+60℃		
LED 结温 LED Junction Temperature		≤80℃		
安全要求 Security Requirement		CE		
环保指令 Environmental Directives		ROHS		
产品尺寸 Product Dimension		L285*W235*H160 mm		
净重 N.W		3 KG		

灯具照度 (Lamp illumination) :

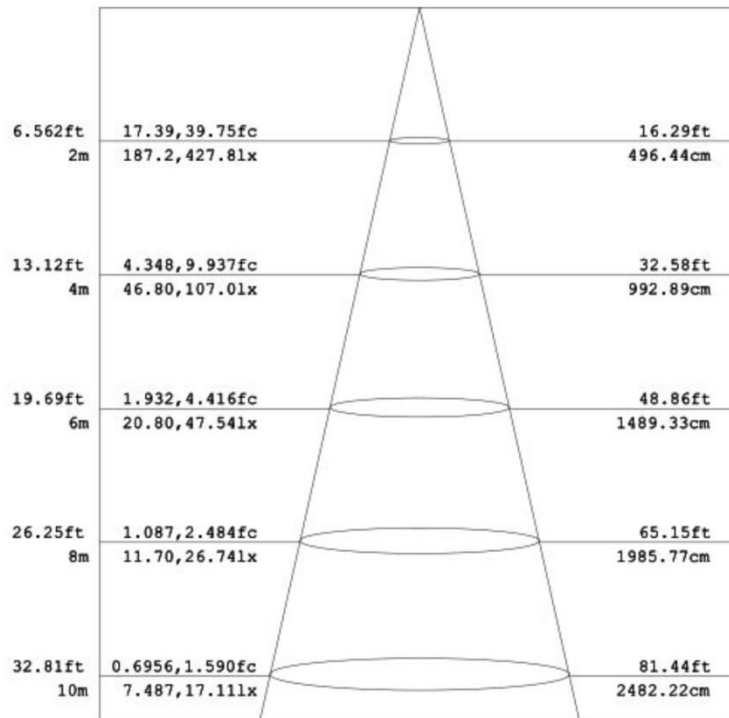

灯具尺寸 (Lamp Size) :

